Live Streaming Notes

- 1) There are 2 mevo camera.
 - a. Ambo
 - b. Altar
- 2) Unplug USB charging cables from each camera and turn on each camera Put the Ambo cable in the Altar Guild room

To turn on Camera - Turn on from the BACK



Camera is ON when there is a GREEN LIGHT on front of camera




3. PC is on. Just turn on the screen. Bottom right LOG into LIVE STREAMING PC (PC on the right)

Password \rightarrow !2727Airline

4. Open VMix Program

Then

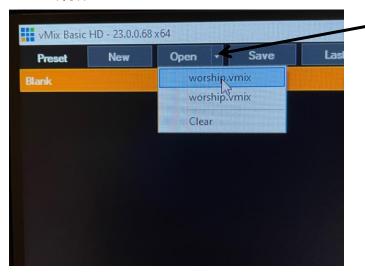

Use OPEN drop Arrow
Then Choose worship.vmix
(the 1st One)


5. Use Church Ipad


Cameras are slow to appear.

6. If cameras DO NOT appear \rightarrow open MEVO app

** Configure button on first camera that shows



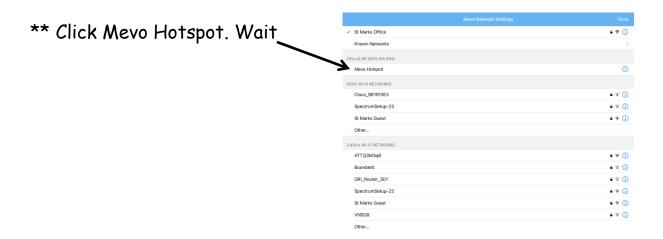

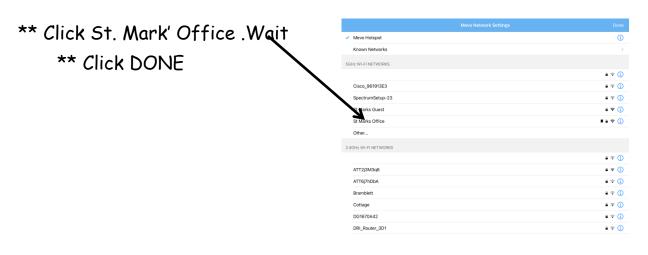

St Marks Office
Known Networks

CELLULAR DATA VIA IPAC
Mevo Hotspot

SGHz WI-FI NETWORKS

Cisco. 961913E3

St Marks Guest

ATT2j3M3q6

DRI_Router_3D1

St Marks Guest

VNSG9

a ♥ (i)

a ₹ (i)

a ⇒ (i)

â **♀** (1)

a ₹ (i)

a ♀ (j)

** It should say ST. Mark's Office

For some reason, we have to Reconnect to Mevo Hotspot
Then back to St. Mark's Office
Wifi!

Click Done . Camera view Should show in VMix.

Usually all 2 cameras will show. If only 1 camera shows, use the ipad Mevo Camera app and scroll to the second camera and find 2^{nd} camera


On the app \rightarrow Configure \rightarrow repeat Instruction #6



7. All 2 camera should show \rightarrow Ambo, Altar and NDI Presentation-PC




- 8. Have someone help you to adjust camera views (Doug Wayland always offers)
 - ** ALTAR camera should be ok.
 - ** AMBO make sure Ambo is centered as best as possible
- 9. Screen Explained

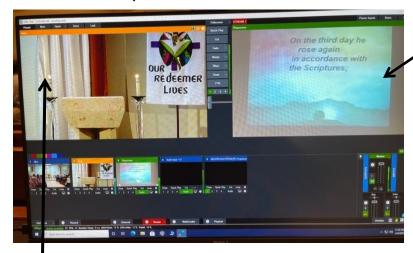

This is your Active
Screen. This is what
LIVE Streams
This is the Responses

The Left Top Screen is the Screen NEXT to go live.

If you Press CUT -- That camera (ambo) goes LIVE

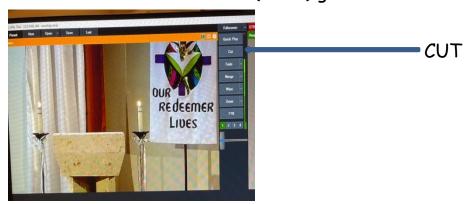

10) You will need to have the NEXT camera view always READY
On the LEFT side. SO when you CUT, you go live with that camera

Generally →

** When FR John is talking, have ALTAR camera live

** When Lay Reader is at the AMBO or Fr John is reading the gospel from the AMBO, have AMBO camera live

** For Songs or long Responses, have NDI Presentaion-PC live


Basically if are switching between Views. Altar, Ambo and NDI Presentaion-PC

The screen on the Upper left is your ACTIVE Live Stream
Always have the next view ready on the Right then press Cut
To get the view in the upper right, click the view from the bottom List!

11) When you are ready to live stream, usually about 5-10 minutes

before the service starts, Press the Stream Tab

Wait the Tab will turn RED
Indicating you are live
Streaming. I usually
Show Altar



When the service is over,

Press Tab again. It will ask you if you really want to end. Click Yes 12) That is it!

Exit the VMix program. You do not need to save.

Turn off the two cameras the same way you turned on.

Check the front of the camera - Red light